




PRODUCT DIMENSIONS & SPECIFICATIONS

GSX13018-601 Matched

MODEL CC - CASED UPFLOW/DOWNFLOW COILS

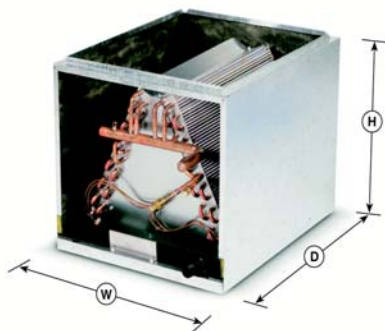

STANDARD SPECIFICATIONS

- Rifled copper tubing, enhanced aluminum fins.
- Immersion-tested at 500 psi, then nitrogen-pressurized and sealed.
- **Right-hand refrigerant and plumbing connections.**
- **Liquid line - 3/8" ODS, suction line - 7/8" ODS.**
- Externally mounted flowrater body with Schrader valve for hiss-testing.
- Embossed galvanized cabinets standard. Cabinets feature furnace connectors (patent pending).
- Split access doors in front for easy service.
- Fully insulated cabinets with faced insulation.
- Five-year limited hassle free warranty.
- ARI certified with ECR brands of A/C and heat pump systems.
- ETL listed.

OPTION CODES:

066 - Same as standard except: Powder coated galvanized metal drain pan with double drain; flanged top duct opening.

Unit shown with service panels removed. Representative drawing only. Some models may vary in appearance.

COIL MODEL	CAPACITY (Tons)	FLOW RATER SIZE	ALL DIMENSIONS IN INCHES							WEIGHT (LBS)
			CABINET WIDTH (W)	CABINET DEPTH (D)	CABINET HEIGHT (H)	PLENUM WIDTH (W)	PLENUM DEPTH (D)	BOTTOM OPENING (W)	BOTTOM OPENING (D)	
CC24A3G-220R-066	2	0.055	22	21-1/2	16	20-1/2	20	21-1/4	20-3/4	37
CC30C3G-220R-066	2-1/2	0.059	22	21-1/2	20	20-1/2	20	21-1/4	20-3/4	56
CC36B3G-220R-066	3	0.068	22	21-1/2	20	20-1/2	20	21-1/4	20-3/4	56
CC42C3G-220R-066	3-1/2	0.074	22	21-1/2	24	20-1/2	20	21-1/4	20-3/4	69
CC48B3G-220R-066	4	0.080	22	21-1/2	24	20-1/2	20	21-1/4	20-3/4	69
CC60D3G-220R-066	5	0.089	22	23	28	20-1/2	21-1/2	21-1/4	22-1/4	91
CC60D3G-260R-066	5	0.089	26	23	28	24-1/2	21-1/2	25-1/4	22-1/4	91

CA, CB, CC, CD, CE, CP, CM Series Coils

C	A	24	A3	F	-145	L	-001
C Series Configuration						Option Code	
A = uncased up/down						Refrigerant and plumbing connections	
B = cased dedicated horizontal LaborSaver						L = left-hand plumbing and refrigerant connections	
C = cased up/down						R = right-hand plumbing and refrigerant connections	
D = full depth cased downflow						T = refrigerant out the top, plumbing out opposite sides	
E = cased multi-position VersaCoil						CA, CM Series: Drain pan width code	
P = cased dedicated horizontal with attached plenum						CB, CC, CD, CE, CP Series: Furnace width code	
M = manufactured home coil						Metering device	
Nominal tonnage (MBTUH)						F = R-22 Flo-rater	
Coil descriptor code (face area, rows, fpi)						G = R-410A Flo-rater	
						B = 20% bleed A/C or H/P R22 TXV	
						X = non-bleed A/C or H/P R22 TXV	
						4 = non-bleed A/C or H/P R410 TXV	

ECR International • P.O. Box 4729 • 2201 Dwyer Ave • Utica • New York • 13504 • 716-366-5500

www.ecrinternational.com